


Sprinter Passenger Van

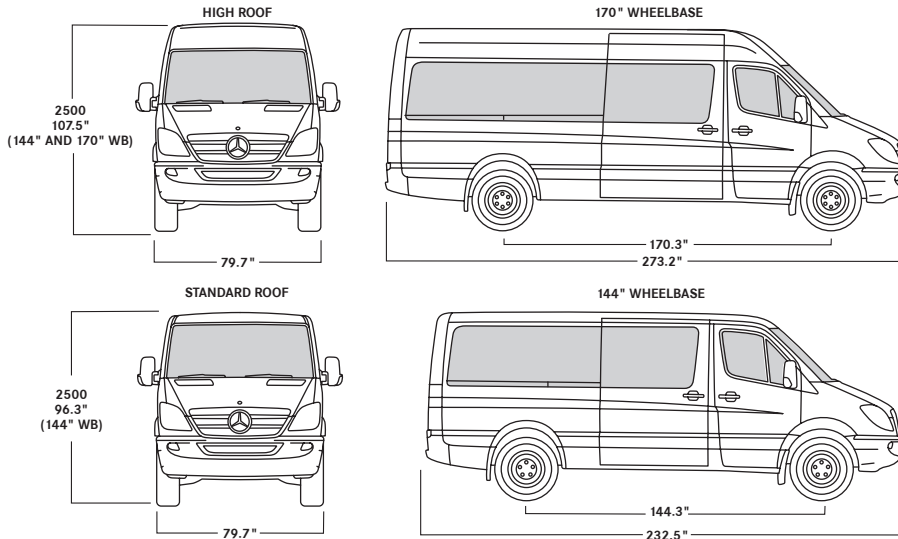

- ▶ 2 wheelbases, 2 body lengths, 2 passenger compartment heights
- ▶ Seating for up to 12 (11+1) people
- ▶ 3- and 4-seater benches for the passenger compartment, quick-release locks permit easy installation and removal (not available for last seat row)
- ▶ Cargo area up to 31.2 sq ft (80 sq ft with seats removed)
- ▶ Cargo volume from 141.3 to 187.2 cu ft
- ▶ Payload from 2,368 to 2,811 lbs
- ▶ Hinged rear doors which open up to the sidewall (doors lock into position automatically)
- ▶ Auxiliary heater and rear air conditioning available as optional equipment (front air conditioning standard)
- ▶ Dark-tinted glass in rear

Powertrain Specifications

BlueTEC® SCR Diesel engine with AdBlue®⁵

EPA / CARB 2010 Compliant

6-cylinder, V 72°

4 valves per cylinder

Displacement 2,987 cc

188 hp at 3,800 rpm

Rated torque 325 lb-ft at 1,400-2,400 rpm

Rear-wheel drive

5-speed automatic transmission

Fuel type: Ultra-low-sulfur diesel

Tank capacity 26.4 gallons

Electronically controlled direct injection with common rail

Turbocharger and intercooler function

Battery 12 V/100 Ah, alternator 220 A

Selected Stand Alone Options

Audio 20 Radio with CD Changer and Bluetooth® Interface

Black Leatherette Upholstery

Chrome Trimmed Radiator Grille

Convenience Lighting in Load/Passenger Compartment

Cruise Control

Daytime Running Lamps

Driver and Front Passenger Thorax Air Bags³

Driver and Front Passenger Window Air Bags³

High Roof

M+S Winter Tires

Mounting Rails for Roof Racks

Reversing Warning System

Two Additional Master Keys

Two Stage Opening Sliding Door

3 PASSENGER VAN MODELS

	STANDARD ROOF		HIGH ROOF
	144" WB	144" WB	170" WB
Turning Diameter (ft) Wall to Wall	47.6	47.6	54.6
Ground to Sliding Door Step – Side	20.2	20.2	19.9
Load Height – Rear	27.6	27.6	27.4
Door Opening Height – Side	59.8	71.7	71.7
Door Opening Height – Rear	60.6	72.4	72.4
Door Opening Width – Side	51.2	51.2	51.2
Door Opening Width – Rear	61.6	61.6	61.6
Cargo/Luggage Area (sq ft)	23.7	23.7	31.2
Interior Width at Wheelhouse	53.1	53.1	53.1
Maximum Width at Floor	70.1	70.1	70.1
Interior Height	65.0	76.4	76.4
Interior Volume (cu ft) Behind Rear Seat	141.3	158.9	187.2
Maximum Available GVWR (lb)	8,550	8,550	8,550
Base Curb Weight (lb)	5,739	5,800	6,182
Maximum Payload (lb)	2,811	2,750	2,368
Maximum Towing (lb)	5,000	5,000	5,000
Maximum Available GCWR (lb)	13,550	13,550	13,550
Fuel Tank Capacity (gal)	26.4	26.4	26.4
Cargo Bed Length	32.5	32.5	73.2

Inches Unless Otherwise Noted

Optional Equipment Packages

Accessory Package

Additional Battery Package

Auxiliary Heater Package

Cold Climate Package

High Idle Fixed Package

High Idle Variable Package

Interior Lighting Package

Lighting Package

Mobility Prep Package

Multi-function Wheel/Display Package

PARKTRONIC Package

Premium Package

Rear Air Conditioning Package

Rear Heating Packages I, II & III

Security Package

Suspension Seating Package

Trailer Hitch Package

Some specifications and features shown or mentioned on this data sheet are optional and only available upon request at extra cost. Specifications are subject to change without notice.

¹ Based on a comparison of the Automotive News classification of full-size commercial vans.

² No system, regardless of how advanced, can overcome the laws of physics or correct careless driving. Please always wear your seat belt. Performance is limited by available traction, which snow, ice and other conditions can affect. Always drive carefully, consistent with conditions. Best performance in snow is obtained with winter tires. Read Operator's Manual before towing. In some states, aftermarket trailer brakes are required. See dealer for details.

³ Warning: the forces of a deploying air bag can cause serious or fatal injuries to a child under age 13. The safest seating position for your child is in a rear seat, belted into an appropriate, properly installed child seat, or correctly wearing a seat belt if too large for a child seat. See Operator's Manual for additional warnings and information on air bags, seat belts and child seats.

⁴ Optional or part of an Option Package.

⁵ Requires the use of ultra-low-sulfur diesel fuel. Mercedes-Benz Sprinters are approved to use B5 biodiesel (approved diesel fuel with a maximum 5% biodiesel content) in all BlueTEC® engines. The only approved biodiesel content is one that meets ASTM D6751 specifications and has the oxidation stability necessary to prevent deposit-/corrosion-related damages to the system (min. 6th, proven by EN14112 method). Please see your service station for further information. If the B5 biodiesel blend does not clearly indicate that it meets the above standards, please do not use it. The Mercedes-Benz New Vehicle Limited Warranty does not cover damage caused by non Mercedes-Benz approved fuel standards.

© 2012 Mercedes-Benz USA, LLC: One Mercedes Drive, Montvale, NJ 07645 · 1-877-762-8267 · www.mbsprinterusa.com

SMB-12-950 Printed in U.S.A.